

CLASSIC STYLE WITH MODERN CONVENIENCE.



BOARD & BATTEN

FINISHING ELEMENTS® SERIES

Tough performance. Great looks.

When it comes to your home's exterior, you want a distinctive look that reflects your personal style. Vytec's Board & Batten delivers with rich, rustic charm and a unique vertical design that will set your home apart from the rest.

- .050" panel thickness is tough enough to stand up to whatever nature dishes out.
- Color choices ranging from bold to subtle let you design a look that's your own.
- Rich woodgrain finish has the look of just-painted wood.
- 6.25" vertical panels have a rugged-looking square-edged overlap.



Remember the other finishing touches.

Board & Batten can enhance your home's overall appearance, but there are other decorative accessories that play an important role in creating a neat, attractive and finished exterior. Ask your contractor about Vytec's wide corner posts, shakes, scallops, and window and door casing that you can use to further customize your home. Vytec's accessories let you choose the look that's right for your home, while providing virtually maintenance-free durability and lasting performance.



The Pros Trust Vytec

At Vytec, we stand behind the products we make. Continued advancements make us a manufacturer you can rely on for innovative, high performing products. It's this dedication to our craft that makes Vytec a partner you can trust.

Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier in the specification of vinyl siding. This siding is intended solely for the sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Physical Characteristics


Profiles: 6.25" Vertical

Exposure: 6.25" (158.75mm)

Panel Projection: .625" (15.88mm)

Packaged: 156.3 square feet/carton

Finish: Woodgrain



6.25" Vertical

Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory through unannounced inspection of all manufacturing facilities verifies the conformance to this specification.

ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

Thickness: .050" +/- 0.001" (average thickness over a six-month period of production)

Length: 10'

Color: Uniformity is spectrophotometrically controlled

Gloss: Uniformity is controlled with 75° glossmeter

Lock: Optically measured and controlled

Product Test Data

Heat shrinkage: <3% at 160° F

Impact resistance mean

failure energy: >60 in.lb.

Static windload test pressure: 30 PSF

Basic wind speed: 151 MPH*

Surface distortion: None at 120° F

Squareness: <1/8" of square

Length: Within -1/4" of specification

Warp/camber: <1/8"

Coefficient of linear expansion (in./°F): 3.15×10^{-5}

Fire Resistance

All Vytec vinyl siding, soffit and accessories have a Class 1 flame-spread classification per 1997 Uniform Fire Code.

ASTM E-84

Flame spread index: <25

Smoke density index: >450

Fuel contribution: 0

ASTM D-1929

Self-ignition temperature: 780° F

ASTM D-635 (Classified CCI)

Test specimens did not burn to 25 mm mark. Material was shown to be self-extinguishing. Therefore, no average extent of burning can be calculated.

Relevant Codes and Regulations Compliance

ASTM D-3679, UBC 14-2,

Texas Department of Insurance

EC-43, CAN/CGSB 41.24, CCMC

Evaluation Report #13008-L

ICC Evaluation Service Report #1020


*The MPH wind speed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of wind speed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.

Additional information on vinyl siding can be obtained by contacting the Vinyl Siding Institute (VSI) at www.vinylsiding.org



Colors throughout this brochure are simulated. Consult product samples before final selection.

† TrueColor® Protection Technology Colors

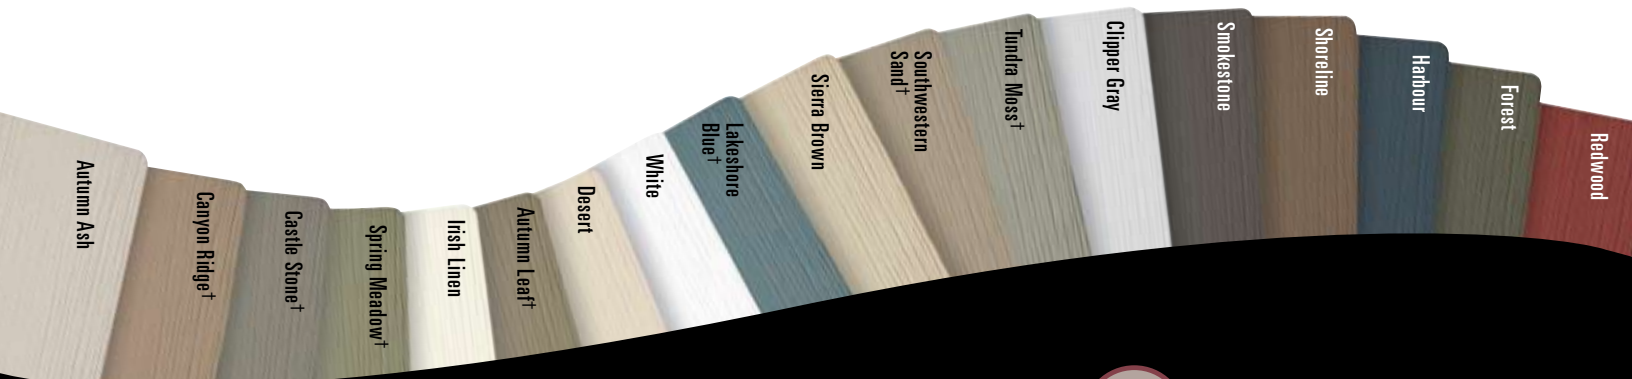

buildingresponsibly™



Pub. No. 44799T. © 1/09 Vytec.

For additional information visit our Web site at www.vytec.com or call 1-800-265-2230.