

DESIGNED TO PERFORM



LIKE NO OTHER.

When you want your home to look its best, you need a premium product that delivers exceptional performance too. Vytec Eminence® siding keeps your home looking its best year after year and ensures your home's exterior will stand up no matter what the season or weather.

# EMINENCE® SIDING

Peace of mind.



- Exclusive Gorilla-Lok® locking system adds strength and rigidity, which helps siding hang straight and span wall imperfections.



- Deep ¾" panel projection enhances panel rigidity and produces attractive shadow lines.
- .046" panel thickness ensures precise dimensional consistency for a snug fit and tight laps.
- Double-thick nailing hem adds strength where the panel attaches to the wall, so it stands up to heavy wind loads.
- Exclusive TruColor® Protection Technology keeps color looking its best year after year.
- Choice of profiles: D4.5 or D4.5DL



Traditional (D4.5) Dutch Lap (D4.5DL)



### Finish it off with accessories.

Finishing Elements® accessories like shakes, scallops and board & batten siding let you customize your home's look, while providing virtually maintenance-free durability and lasting performance.



## The Pros Trust Vytec

At Vytec, we stand behind the products we make. Continued advancements make us a manufacturer you can rely on for innovative, high performing products. It's this dedication to our craft that makes Vytec a partner you can trust.

## Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier of Eminence vinyl siding. This siding is intended solely for the sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

## Physical Characteristics

**Profiles:** 4.5" Dutch Lap  
4.5" Traditional


### Exposure:

9" (228 mm) – 4.5" Dutch Lap  
9" (228 mm) – 4.5" Traditional


### Panel Projection:

.75" (19.05 mm) – 4.5" Dutch Lap  
.75" (19.05 mm) – 4.5" Traditional

**Double 4.5"  
Dutch Lap  
.046" thickness**



**Double 4.5"  
Traditional  
.046" thickness**



## Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory through unannounced inspections of all manufacturing facilities verifies the conformance to this specification. ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

**Thickness:** .046" +/- 0.001" (average thickness over a six-month period of production)

### Length:

13' 4" (406.4 cm) – 4.5" Dutch Lap  
13' 4" (406.4 cm) – 4.5" Traditional

**Color:** Uniformity is spectrophotometrically controlled

**Gloss:** Uniformity is controlled with 75° glossmeter

**Lock:** Optically measured and controlled

## Product Test Data

Heat shrinkage: <3% at 160° F

Impact resistance mean failure energy: >60 in.lb.

Static windload test pressure: 70 PSF

Design windload: 232 MPH\*

Surface distortion: None at 120° F

Squareness: <1/8" of square

Length: Within -1/4" of specification

Warp/camber: <1/8"

Coefficient of linear expansion (in./in./°F): 3.15 x 10<sup>-5</sup>

## Fire Resistance

All Vytec vinyl siding, soffit and accessories have a Class 1 flame spread classification per 1997 Uniform Fire Code.

### ASTM E-84

Flame spread index: <25

Smoke density index: >450

Fuel contribution: 0

## Relevant Codes and Regulations Compliance

Conforms to ASTM Specification D-3679

Conforms to UBC Standard 14-2


CCMC Listing #13008-L

ICC Evaluation Service Report ESR-1066

\*The MPH windspeed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of windspeed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.

Additional information on vinyl siding can be obtained by contacting the Vinyl Siding Institute (VSI) at [www.vinylsiding.org](http://www.vinylsiding.org)

Colors throughout this brochure are simulated. Consult product samples before final selection.

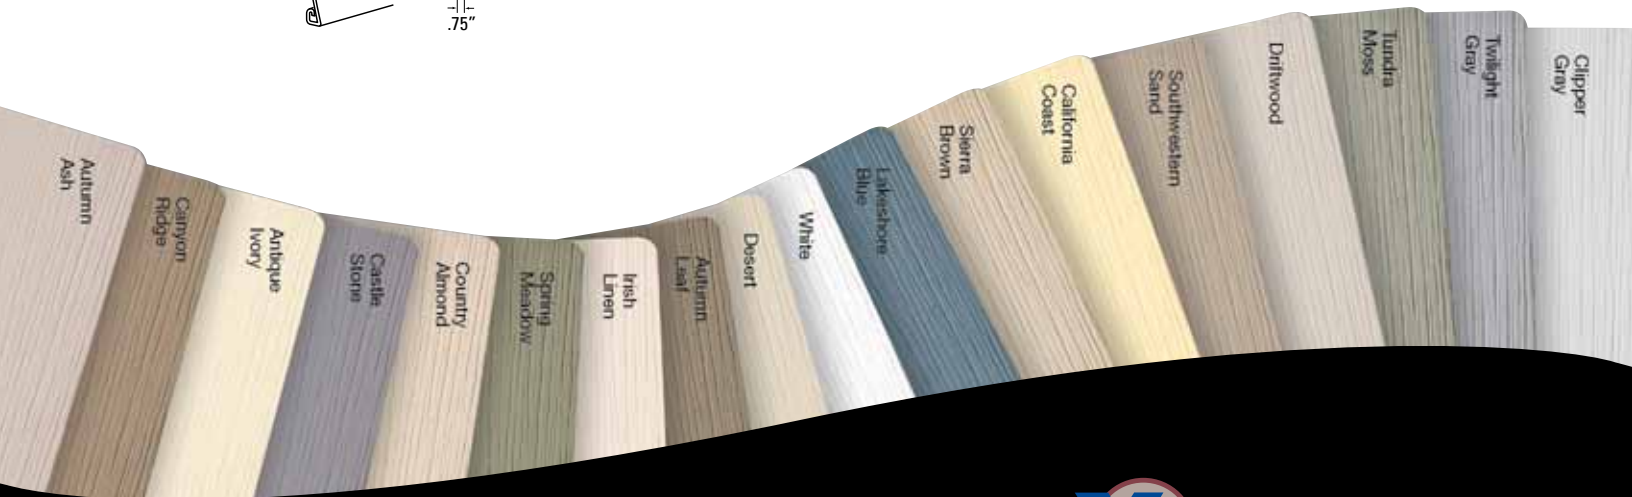

buildingresponsibly™



Pub. No. 58433. © 5/10 Vytec.

For additional information visit our Web site at [www.vytec.com](http://www.vytec.com) or call 1-800-265-2230.