



COLOR AND STYLE

THAT'S ONE OF A KIND.



PRESTIGE[®]
SIDING


Tough performance. Great looks.

Designing your home's exterior means expressing your personal style. Prestige siding from Vytec makes it simple with distinctive colors and styles to suit your home's design. And since it's made by Vytec you can be sure you're choosing siding that's built to last.

- Exclusive line of dark, rich colors lets you create a look that makes a statement.
- TruColor[®] Protection Technology keeps color looking fresh for years to come.
- Elegant oak wood grain has the natural look of real wood.
- Posilok[®] locking system holds panels securely, while allowing the siding to expand and contract in changing temperatures.
- .044" thickness offers lasting strength with precise dimensional consistency that ensures a snug fit and tight laps.
- Double-thick nailing hem with burr-free nailing slots adds strength where the panel meets the wall.

- Choice of timeless profiles: D4.5DL, D5DL and D4.5

Dutch Lap (D4.5DL and D5DL)



Traditional (D4.5)



Finish up with accessories.

Finishing Elements[®] accessories like shakes, scallops and board & batten let you customize your home's look, while providing virtually maintenance-free durability and lasting performance.



The Pros Trust Vytec

At Vytec, we stand behind the products we make. Continued advancements make us a manufacturer you can rely on for innovative, high performing products. It's this dedication to our craft that makes Vytec a partner you can trust.

Physical Characteristics

Profiles: 4.5" Dutch Lap
5" Dutch Lap
4.5" Traditional


Exposure:

9" (228 mm) – 4.5" Dutch Lap
10" (254 mm) – 5" Dutch Lap
9" (228 mm) – 4.5" Traditional


Panel Projection:

.500" (12.70 mm) – 4.5" Dutch Lap
.650" (16.50 mm) – 5" Dutch Lap
.560" (14.20 mm) – 4.5" Traditional


Double 4.5" Dutch Lap
.044" thickness



Double 5" Dutch Lap
.044" thickness



Double 4.5" Traditional
.044" thickness



Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier of Prestige® siding. This siding is intended solely for the sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory, through unannounced inspections of all manufacturing facilities, verifies the conformance to this specification. ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

Thickness: .044" +/- 0.001" (average thickness over a six-month period of production)

Length:

12' 11 1/8" (3.94 m) – 4.5" Dutch Lap
12' 11 1/2" (3.94 m) – 5" Dutch Lap
12' 11 1/8" (3.94 m) – 4.5" Traditional

Color: Uniformity is spectrophotometrically controlled

Gloss: Uniformity is controlled with 75° glossmeter

Lock: Optically measured and controlled

Product Test Data

Heat shrinkage: <3% at 160° F

Impact resistance mean

failure energy: >60 in.lb.

Static windload test pressure: 38 PSF

Basic wind speed: 172 MPH*

Surface distortion: None at 120° F

Squareness: <1/8" of square

Length: Within -1/4" of specification

Warp/camber: <1/8"

Coefficient of linear expansion

(in./in./°F): 3.15 x 10⁻⁵

Fire Resistance

All Vytec vinyl siding, soffit and accessories have a Class 1 flame-spread classification per 1997 Uniform Fire Code.

ASTM E-84

Flame spread index: <25

Smoke density index: >450

Fuel contribution: 0

ASTM D-1929

Self-ignition temperature: 780° F

ASTM D-635 (Classified CCI)

Test specimens did not burn to 25 mm mark. Material was shown to be self-extinguishing. Therefore, no average extent of burning can be calculated.

Relevant Codes and Regulations Compliance

ASTM D-3679, UBC 14-2,

Texas Department of Insurance

EC-43, CAN/CGSB 41.24, CCMC


Evaluation Report #13008-L

ICC Evaluation Service Report #1020

*The MPH wind speed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of wind speed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.

Additional information on vinyl siding can be obtained by contacting the Vinyl Siding Institute (VSI) at www.vinylsiding.org

Colors throughout this brochure are simulated. Consult product samples before final selection.

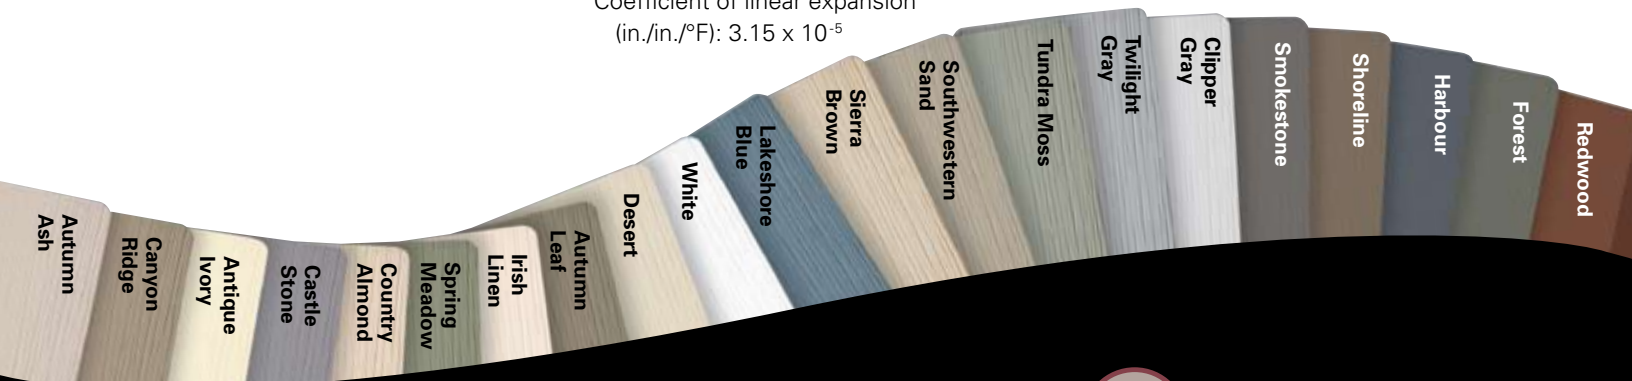

buildingresponsibly™



Pub. No. 68429. © 1/09 Vytec.

For additional information visit our Web site at www.vytec.com or call 1-800-265-2230.