



THE LOOK

THAT SAYS HOME.

At Vyttec, we think designing a home's exterior should be something you feel good about. When you choose Proside LG siding, you're choosing a product that's proven to perform in every way.

- Posilok® locking system holds panels securely, while allowing expansion and contraction in changing weather.
- .042" panel thickness delivers lasting toughness and helps panels hang straighter on the wall.
- Elegant low-gloss finish and enhanced shadow lines create the look of real wood.
- Nailing hem adds strength where the panel meets the wall.

PROSIDE® LG
SIDING

The professional's choice.

- Choice of profiles:

D4
D4.5
D4.5DL
S8

Single	Traditional		Dutch Lap
S8	D4	D4.5	D4.5DL



Accessories complete the picture.

Accessories like corner posts and soffit are essential to any vinyl siding installation. But adding elements like shakes can take your home's exterior design up a notch.



The Pros Trust Vytec

At Vytec, we stand behind the products we make. Continued advancements make us a manufacturer you can rely on for innovative, high performing products. It's this dedication to our craft that makes Vytec a partner you can trust.

Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier of Proside LG vinyl siding. This siding is intended solely for the sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Physical Characteristics


Profiles: D4" Traditional
D4.5" Traditional
D4.5" Dutch Lap
S8" Traditional

Exposure:

D4" Traditional – 7.874" (200.0 mm)
D4.5" Traditional – 9" (228.6 mm)
D4.5" Dutch Lap – 9" (228.6 mm)
S8" Traditional – 7.783" (197.69 mm)


Panel Projection:

D4" Traditional – 1/2" (13 mm)
D4.5" Traditional – 1/2" (13 mm)
D4.5" Dutch Lap – 1/2" (13 mm)
S8" Traditional – 5/8" (15.88 mm)

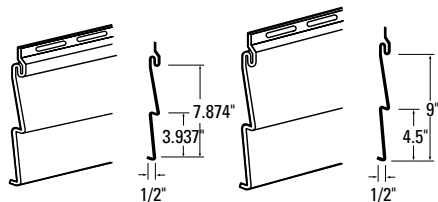

Double 4" Traditional
.042" thickness

Double 4.5" Traditional
.042" thickness

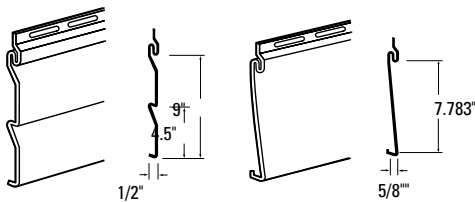

Double 4.5" Dutch Lap
.042" thickness

Single 8" Traditional
.045" thickness

Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory, through unannounced inspections of all manufacturing facilities, verifies the conformance to this specification. ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

Thickness: .042" +/- 0.001" (average thickness over a six-month period of production)

Length:

D4" Traditional – 12' 3⁵/₈" (3.75 m)
D4.5" Traditional – 12' 11¹/₈" (3.94 m)
D4.5" Dutch Lap – 12' 11¹/₈" (3.94 m)
S8" Traditional – 12' 3⁵/₈" (3.75 m)

Color: Uniformity is

spectrophotometrically controlled

Gloss: Uniformity is controlled with 75° glossmeter

Lock: Optically measured and controlled

Product Test Data

Heat shrinkage: <3% at 160° F

Impact resistance mean failure energy: >60 in.lb.

Static windload test pressure: 42 PSF

Basic wind speed: 152 MPH*

Surface distortion: None at 120° F

Squareness: <1/8" of square

Length: Within 1/4" of specification

Warp/camber: <1/8"

Coefficient of linear expansion (in./in./°F): 3.15 x 10-5

Fire Resistance

All Vytec vinyl siding, soffit and accessories have a Class 1 flame-spread classification per 1997 Uniform Fire Code.

ASTM E-84

Flame spread index: <25

Smoke density index: >450

Fuel contribution: 0

Relevant Codes and Regulations Compliance

Conforms to ASTM Specification D-3679

Conforms to UBC Standard 14-2

CCMC Listing #13008-L

ICC Evaluation Service Report ESR-1066

*The MPH wind speed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of wind speed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.

Colors throughout this brochure are simulated. Consult product samples before final selection.

Horizon
Blue

Sage
Green

Clipper
Gray

Storm

Estate
Gray

Autumn
Ash

Terra
Clay

Desert

Sierra
Brown

Country
Almond

Irish
Linen

Antique
Ivory

White

buildingresponsibly™



Pub. No. 58243LG. © 4/12 Vytec.

For additional information visit our Web site at www.vytec.com or call 1-800-265-2230.