



DESIGN

ONE STEP AT A TIME.

At Vyttec, we think designing your home's exterior should be fun – and simple. With our Triple 3 siding you can give your home old-fashion elegance that also makes your life easier.

First, a distinctive profile.

- The Triple 3 panel profile offers clean, crisp lines with a nostalgic touch.
- Ideal for home styles ranging from Victorian to Cape Cod or farmhouse designs.

Next, the color that's right for you.

With Vyttec siding you won't get just any color, you'll get the right color. Here are a few tips for choosing the right color.

- Choose light colors to make your home look larger.
- Pick a darker color to make a large home look less imposing.
- Consider pairing a lighter wall color with a darker accent color to call attention to details like dormers.
- For best results, choose a siding that complements your roof color.

Make the most of the wood grain

Vyttec Triple 3 has a subtle, low-gloss wood grain finish that looks just like painted wood.

Finish it off with accessories.

Finishing Elements® accessories like shakes, scallops and board & batten let you customize your home's look, while providing virtually maintenance-free durability and lasting performance.



TRIPLE 3
SIDING
Timeless style built for today.



Certificate of Conformance

The certificate of conformance is provided to assist the architect or specifier of Triple 3 vinyl siding. This siding is intended solely for sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Physical Characteristics


Profiles: Triple Three

Exposure:

9" (228 mm) – triple three

Panel Projection:

.434" (11.02 mm) – triple three



Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory, through unannounced inspections of all manufacturing facilities, verifies the conformance to this specification. ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

Thickness: .042" +/- 0.001" (average thickness over a six-month period of production)

Length:

12' 11¹/₈" (3.94 m) – triple three

Color: Uniformity is spectrophotometrically controlled

Gloss: Uniformity is controlled with 75° glossmeter

Lock: Optically measured and controlled

Product Test Data

Heat shrinkage: <3% at 160° F

Static windload test pressure: 34 PSF

Basic wind speed: 135 MPH*

Surface distortion: None at 120° F

Squareness: <1/8" of square

Length: Within -1/4" of specification

Warp/camber: <1/8"

Fire Resistance

All Vytec vinyl siding, soffit and accessories have a Class 1 flame-spread classification per 1997 Uniform Fire Code.

ASTM E-84

Flame spread index: <25

Smoke density index: >450

Fuel contribution: 0

ASTM D-1929

Self-ignition temperature: 780° F

ASTM D-635 (Classified CCI)

Test specimens did not burn to 25 mm mark. Material was shown to be self-extinguishing. Therefore, no average extent of burning can be calculated.

Relevant Codes and Regulations Compliance

ASTM D-3679, UBC 14-2

Texas Department of Insurance

EC-43, CAN/CGSB 41.24, CCMC

Evaluation Report


#13008-L, ICC Evaluation Report

#1020 (D4.5 and DLD4.5 only).

*The MPH windspeed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of windspeed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.

Additional information on vinyl siding can be obtained by contacting the Vinyl Siding Institute (VSI) at 1-888-367-8741 or www.vinylsiding.org

Colors throughout this brochure are simulated.
Consult product samples before final selection.

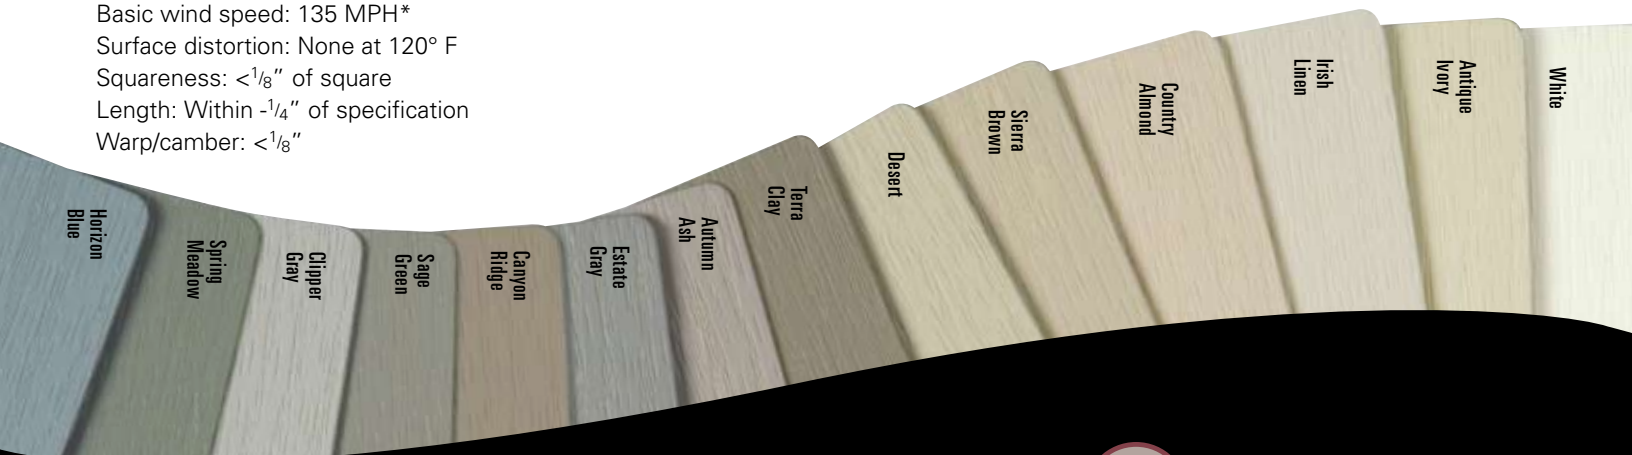

buildingresponsibly™



Pub. No. 58062. © 1/09 Vytec.

For additional information visit our Web site at www.vytec.com or call 1-800-265-2230.